ANDON
INTERCONNECTION SPECIALISTS

ISO 9001:2000
CERTIFIED

SERIES 214 ZIG-ZAG SOCKET (SOLID FRAME)

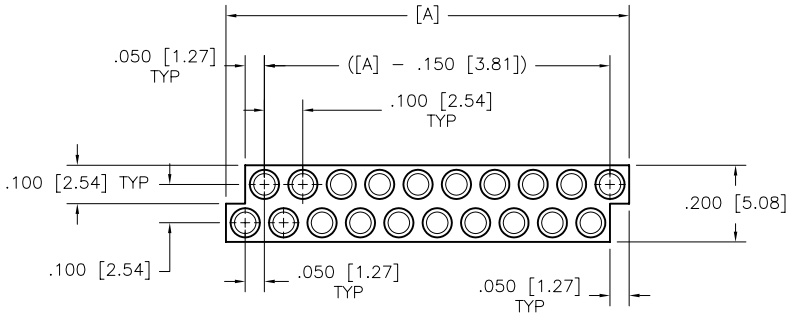

PIN	DIM [A]	ORDER-CODE
20	1.050 [26.67]	220
24	1.250 [31.75]	224
40	2.050 [52.07]	240
64	3.250 [82.55]	264



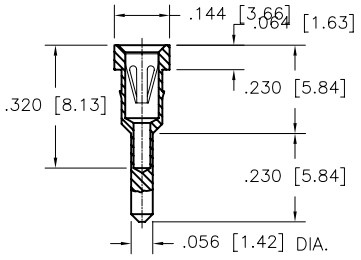

47



FIG. D

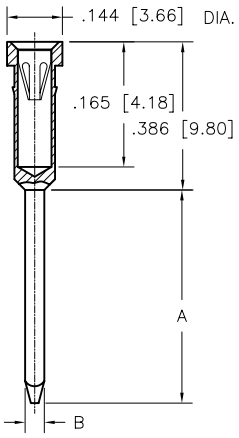

FIG. C

TERMINAL STYLE			
TERMINAL	FIG.	DIM "A"	DIM "B"
-01	D	.115 [2.92]	.020 [0.51]
-03	C	.510 [12.95]	.025 [0.64]
-08	D	.170 [4.31]	.020 [0.51]
-94	D	.125 [3.17]	.018 [0.46]

CONTACT TYPE

S: STANDARD DIP INSERTION FORCE 9.0 oz. AVG.
WITHDRAWAL FORCE 2.0 oz. MIN.

TECHNICAL SPECIFICATIONS

MATERIAL	
INSULATOR	GLASS FILLED POLYESTER UL 94V-0 LISTED
TERMINAL	BRASS PER ASTM-B16
CONTACT	BeCu PER ASTM-B194
OPERATING TEMP.	-65°C TO +125°C

ORDERING INFORMATION

214-XXX-XXX-PXX-B10

- SERIES
- ORDER CODE
- TERMINAL STYLE
  FOR OPTIONAL TERMINAL STYLES
  SEE TERMINAL STYLES
- CONTACT TYPE
- LOGO
- INSULATOR MATERIAL
  OTHER MATERIALS AVAILABLE
  CONSULT FACTORY
- PLATING: TERMINAL CONTACT
  P30: GOLD / GOLD
  P31: TIN-LEAD / GOLD
  P32: TIN-LEAD / TIN
  OTHER PLATINGS AVAILABLE
  SEE OPTIONAL PLATINGS

© 2007 ANDON ELECTRONICS CORP

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

ANDON ELECTRONICS CORPORATION
4 COURT DRIVE, LINCOLN, R.I. 02865, USA
TEL. (401) 333-0388 / FAX (401) 333-0287
E-MAIL: info@andonelect.com
WEB SITE: http://www.andonelect.com

XX